



Features/Applications

GREMARK® GMZH is a printable, flame retardant, halogen free polyolefin heat shrink tubing in a ladder format. GREMARK® GMZH offers an excellent solution for cable identification. GREMARK® GMZH is suitable for identifying cables and wires in electrical cabinets, cable harness assemblies for railway applications when zero halogen, low smoke and low toxicity properties are required.

Various

Standard colours: White, yellow.
Other colours available on request.

Specifications

Railway approved EN 45545-2 R22-R23.

Preferred printer / ribbon combination


To be used with the GREMTEK printing system
- Thermal transfer printer type SQUIX 4 (one side) or XD4 (double side)
- Thermal transfer ribbon type GR-TT6100

Dimensions



Reference	As supplied (mm)	After recovery (mm)		Packaging (Sleeve/spool)
GREMARK® GMZH	Inside Diameter Min. (D)	Inside Diameter Max. (d)	Wall Thickness Min. (t)	
0016-25-0-9	1,8	0,8	0,39	2500
0024-25-0-9	2,6	1,2	0,43	2500
0032-20-0-9	3,4	1,6	0,45	2000
0048-20-0-9	5,0	2,4	0,48	2000
0064-20-0-9	6,6	3,2	0,50	2000
0095-10-0-9	9,9	4,8	0,53	1000
0127-10-0-9	13,1	6,4	0,53	1000
0190-5-0-9	19,7	9,5	0,55	500
0250-5-0-9	26,3	12,7	0,56	500
0380-5-0-9	39,3	19,1	0,57	500
0510-2,5-0-9	52,4	25,4	0,56	250
0760-2,5-0-9	78,8	38,1	0,55	250

• Spools as standard, marked pieces available on request

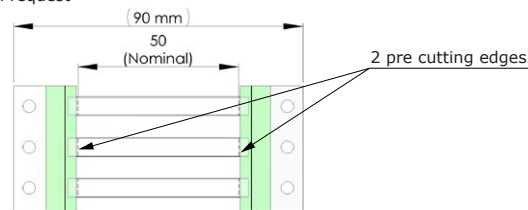


Options

Pre-scoring	0 (by default)	1	2	3
Printable area size	1 x 50mm	2 x 25mm	3 x 16mm	4 x 12,5mm
Colour code	4		9	
Standard colour	Yellow		White	

• As a standard GREMARK® is delivered with 2 pre cutting edges.

Part numbering system

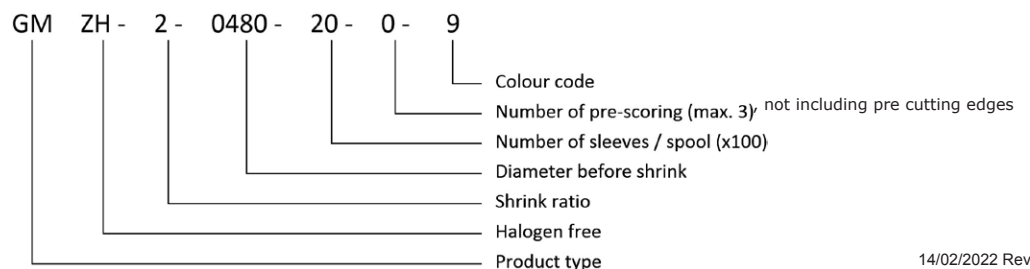

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 50°C) and in closed containers.

